


**MODEL**  
**325**  
*Single Offset Disc*

**KELLO-BILT**

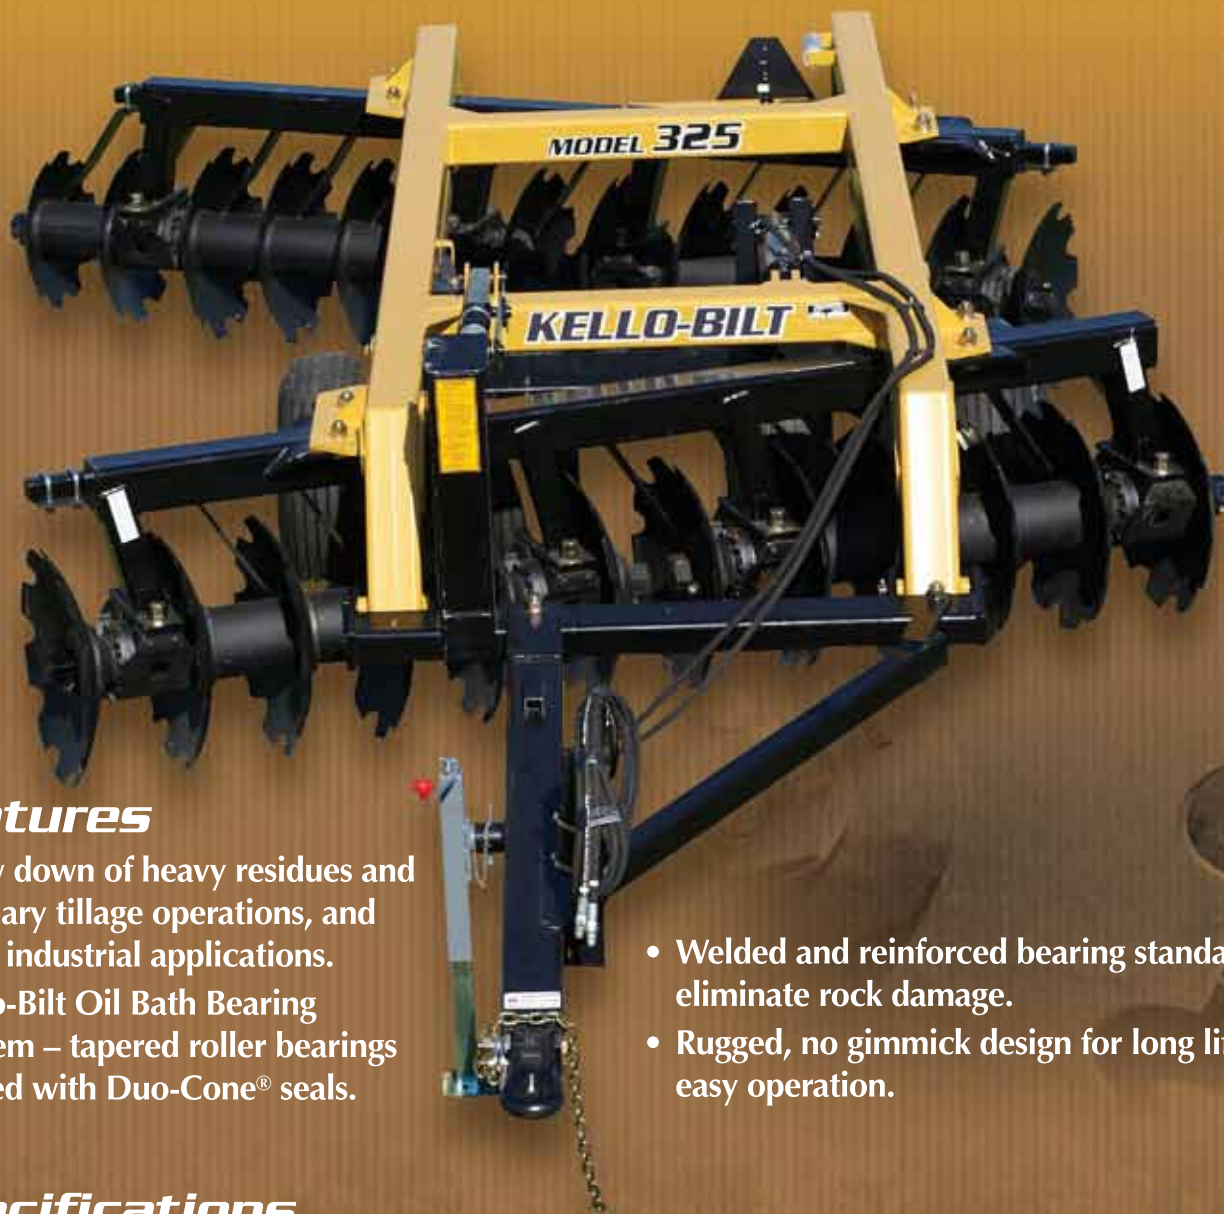

## Features

- Plow down of heavy residues and primary tillage operations, and light industrial applications.
- Kello-Bilt Oil Bath Bearing System – tapered roller bearings sealed with Duo-Cone® seals.
- Welded and reinforced bearing standards eliminate rock damage.
- Rugged, no gimmick design for long life and easy operation.

## Specifications

Model Number	Working Width ft.	Weight (lbs)	Weight per Disc (lbs)*	Tractor Draw Bar Horsepower**
325-17B	8'	8,930	595	120+
325-21B	10'	9,580	504	130+
325-25B	12'	10,170	442	150+
325-29B	14'	10,580	392	170+
325-332BWF	16'	12,370	399	200+

\* Does not include tapered furrow filler discs.

\*\* Drawbar horsepower requirements vary with soil conditions, topography, weight added to harrow, and tractor type (steel track, rubber track, or rubber tire).

Kello-Bilt Inc. reserves the right to change pricing and specifications without notice.

# MODEL 325

## Single Offset Disc



### Frame

6" x 6" x 3/8" high strength steel tube, fully welded and reinforced. 6" x 6" x 1/2" on BWF Models.



### Disc Blades

3/8" x 28" notched disc blades front and rear. 30" and 32" notched blades are available.



### Bearings

Oil bath, back-to-back tapered roller bearings in heavy ductile cast housing c/w floating Duo-Cone® seals. Bearings operate in 90W gear oil for constant lubrication. Bearings come complete with wear plate.



### Hubs/Tires

12.5L x 15 highway service implement tires (4) mounted on 8 bolt hub assemblies.



### Gang Shaft

2 1/2" heat treated high strength alloy steel, threaded at both ends.



### Hydraulics

5" x 16" hydraulic cylinders complete with hoses, depth control segments and cylinder transport lock.



### Spacing

12" fabricated heavy steel spacer spools designed to maintain gang tightness.



### Standard

7000lb hitch jack, safety chain, slow moving vehicle sign, plated grade 8 fasteners, transport safety locks, gang wrench (2), and separate fore/aft and transport level controls.



16 Belich Crescent | Red Deer County, AB, Canada T4S 2K5

Phone: (403) 347-9500 | Fax: (403) 347-3724

Toll Free: 1-877-613-9500

Email: [info@kello-bilt.com](mailto:info@kello-bilt.com) | [www.kello-bilt.com](http://www.kello-bilt.com)

 [facebook@kello-bilt.com](https://www.facebook.com/kello-bilt.com)

 [instagram@kello-bilt.com](https://www.instagram.com/kello-bilt.com)

 [twitter@kello-bilt.com](https://www.twitter.com/kello-bilt.com)