


MODEL 275

Single Offset Disc

KELLO-BILT

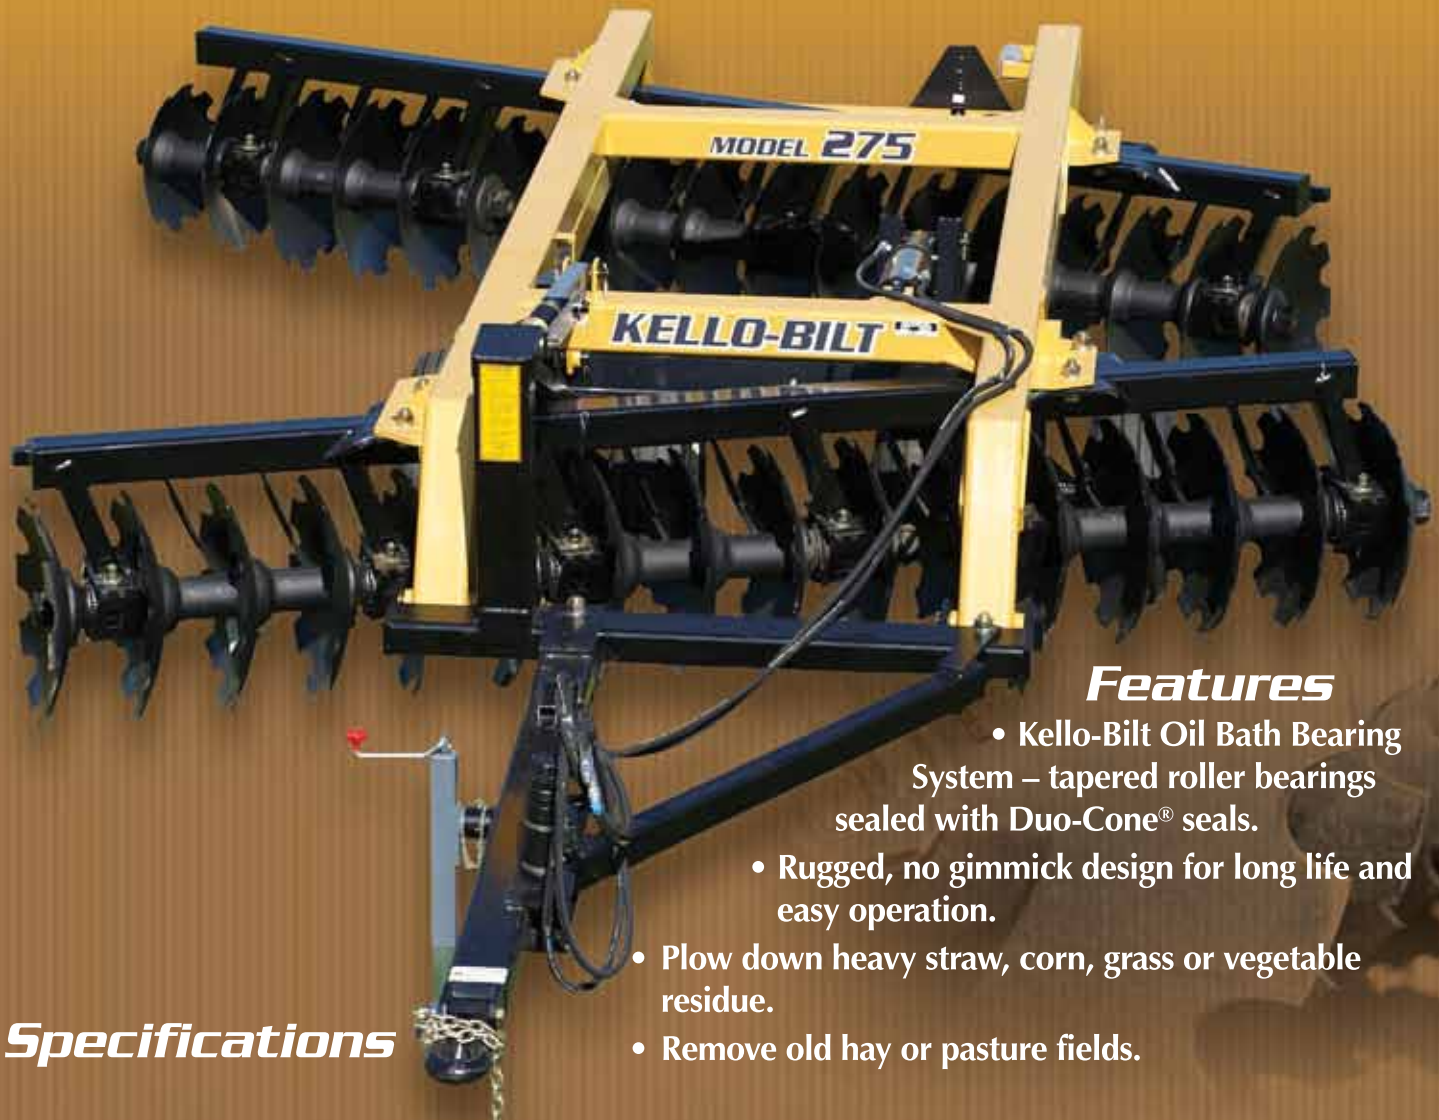

Features

- Kello-Bilt Oil Bath Bearing System – tapered roller bearings sealed with Duo-Cone® seals.
- Rugged, no gimmick design for long life and easy operation.
- Plow down heavy straw, corn, grass or vegetable residue.
- Remove old hay or pasture fields.

Specifications

Model Number	Working Width ft.	Weight (lbs)	Weight per Disc (lbs)*	Tractor Draw Bar Horsepower**
275-232B	10'	7,990	380	120+
275-272B	12'	8,380	335	140+
275-332B	14'	9,310	300	160+
275-372BWF	16'	11,370	325	190+
275-412BWF	17'	11,910	305	200+
275-452BWF	19'	12,260	285	210+
275-492BWF	21'	12,720	270	220+
275-552BWF	24'	13,250	250	240+

* Does not include tapered furrow filler discs.

** Drawbar horsepower requirements vary with soil conditions, topography, weight added to harrow, and tractor type (steel track, rubber track, or rubber tire).

Kello-Bilt Inc. reserves the right to change pricing and specifications without notice.

MODEL 275

Single Offset Disc



Frame

6" x 6" x 3/8" high strength steel tube, fully welded and reinforced. 6" x 6" x 1/2" on BWF Models.



Disc Blades

5/16" x 26" (28" optional) notched disc blades front and rear. Optional wavy or smooth blades available.



Bearings

Oil bath, back-to-back tapered roller bearings in heavy ductile cast housing c/w floating Duo-Cone® seals. Bearings operate in 90W gear oil for constant lubrication. Bearings comes complete with wear plate.



Hubs/Tires

11L x 15 highway service implement tires (4) mounted on 8 bolt hub assemblies.



Gang Shaft

2 1/8" heat treated high strength alloy steel, threaded at both ends.



Hydraulics

5" x 16" hydraulic cylinder complete with hoses, depth control segments and cylinder transport lock.



Spacing

10 1/2" fabricated steel spacer spools designed to maintain gang tightness.



Standard

7000lb hitch jack, safety chain, slow moving vehicle sign, plated grade 8 fasteners, transport safety locks, gang wrench (2), and separate fore/aft and transport level controls.



16 Belich Crescent | Red Deer County, AB, Canada T4S 2K5

Phone: (403) 347-9500 | Fax: (403) 347-3724

Toll Free: 1-877-613-9500

Email: info@kello-bilt.com | www.kello-bilt.com

 [facebook@kello-bilt.com](https://www.facebook.com/kello-bilt.com)

 [instagram@kello-bilt.com](https://www.instagram.com/kello-bilt.com)

 [twitter@kello-bilt.com](https://twitter.com/kello-bilt.com)